



**Selection,
Innovation,
Performance**

Your trusted partner in Scrap
and Demolition attachments



STANLEY
Infrastructure

INDUSTRIAL TOOLS & ATTACHMENTS

 **PALADIN** **STANLEY** **LABOUNTY**  **PENGO**

YOUR TRUSTED PARTNER IN THE SCRAP AND DEMOLITION INDUSTRY

LaBounty has supplied the most reliable shear and demolition attachments to the market since 1973. When LaBounty invented the mobile shear in 1977, it drastically improved metal and concrete processing and transformed an entire industry.

With business output and efficiency top of mind, LaBounty continues to deliver mechanical and digital innovations that put customers at the forefront of productivity. Backed by one of the industry's best warranties and a world-class service and support team, users can spend time focusing on what matters most: because we know it's what's on the ground at the end of the day that counts.



80+ DEALERS GLOBALLY


www.stanleyinfrastructure.com/en/contact/sales-service-directory



**40+ YEARS IN SCRAP
& DEMOLITION INDUSTRY**



**WORLD CLASS
PRODUCT SUPPORT**

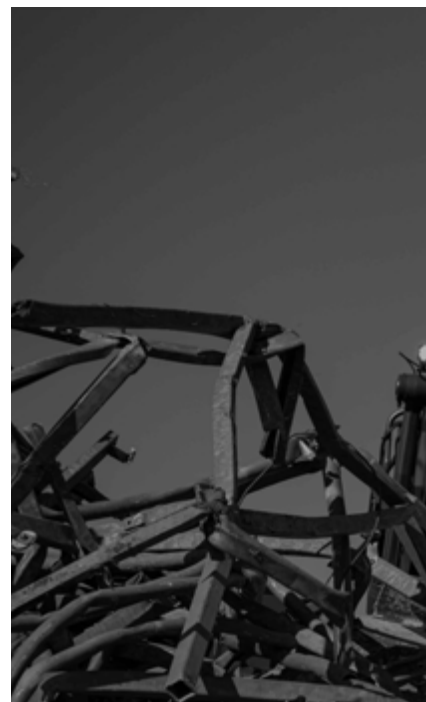



50  SINCE 1973
LABOUNTY®





LABOUNTY PRODUCT SUPPORT

When you buy a LaBounty attachment you become part of an exclusive group of strategic partners. We take pride in backing up our world-class products with the industry's most technologically advanced support team.

- In order to quickly respond to your installation, service and parts requirements our dedicated factory support team is available by phone at **833-723-1843** or email at **Labountyparts@sbdinc.com**.
- When you need on-site support our team of field service technicians are strategically placed in the United States to respond to your technical support and training requests.
- For deeper product training, we offer LaBounty training upon request and can cater to your needs. Please contact your LaBounty rep for more information.

For up-to-date territory maps and contact information, please visit:

www.stanleyinfrastructure.com/en/contact/sales-service-directory



SELECTION. INNOVATION. PERFORMANCE.

Founded in 1973 by Roy LaBounty in Two Harbors, Minnesota to provide specialty excavator attachments to the scrap and demolition markets.

Purchased in 1992 by The Stanley Works (now Stanley Black & Decker) to compliment a line of demolition attachments in the Stanley Hydraulic Tools business (now Stanley Infrastructure).

Two Harbors, MN 

**47°14'35"N
91°39'47"W**

TABLE OF CONTENTS

MOBILE SHEARS



DEMOLITION ATTACHMENTS

DEMOLITION APPLICATIONS GUIDE 28



MATERIAL HANDLING ATTACHMENTS



MOBILE SHEARS





FULL PROTECTION - LESS MAINTENANCE, MORE UPTIME



Patent Pending Dual Max™ Indexable Protection

The industry's only full-protection, indexable, piercing tip that doubles tip-blade life.



Up to 10% More Force

The new MSD Legend has enhanced jaw geometry resulting in up to 10% more cutting force at the apex compared to prior model.



InSite™ Equipped

Every shear ordered with InSite will come with a 3-year warranty. InSite pulls information from LaBounty shears to provide performance metrics that help increase productivity and reduce downtime.



MSD MOBILE SHEARS

PERFORMANCE OPTIMIZATION

GET MORE PRODUCTIVITY

In today's world, it isn't enough to have the best designed and time tested shear in the world. Today, you need every edge possible to grow your profitability -- that's why we developed InSite.

InSite provides actionable information to prevent downtime and increase productivity to boost your bottom-line.

IN | SITE |

“Maintenance is the backbone of my organization, InSite has the information we need to avoid costly downtime.

Lue Plucinski
President - BL Duke

“With InSite we can now pin down an issue in a matter of minutes, where it might take my mechanics a couple of hours to diagnose an issue.

Josh Wilkins
President - Brookfield Iron and Metal

BENEFITS OF InSite™

Optimize Shear Performance

Get the most out of your shear by confirming pressures and flows are set correctly.

Get More Work Done

Process more by idling, sorting and moving the shear less. InSite's Job Tracker can show you how.

Fix Problems Before They Occur

Receive actionable information to help you avoid costly downtime.



- Location Tracking
- Productivity Tracking
- Abnormality Alerts

MOBILE APPLICATION



Available on the
App Store


GET IT ON
Google Play

Search "insitepro"

LEGEND SERIES

FEATURES & BENEFITS

LaBounty shears have proven themselves in scrap metal processing, bridge deconstruction, and industrial demolition for decades.

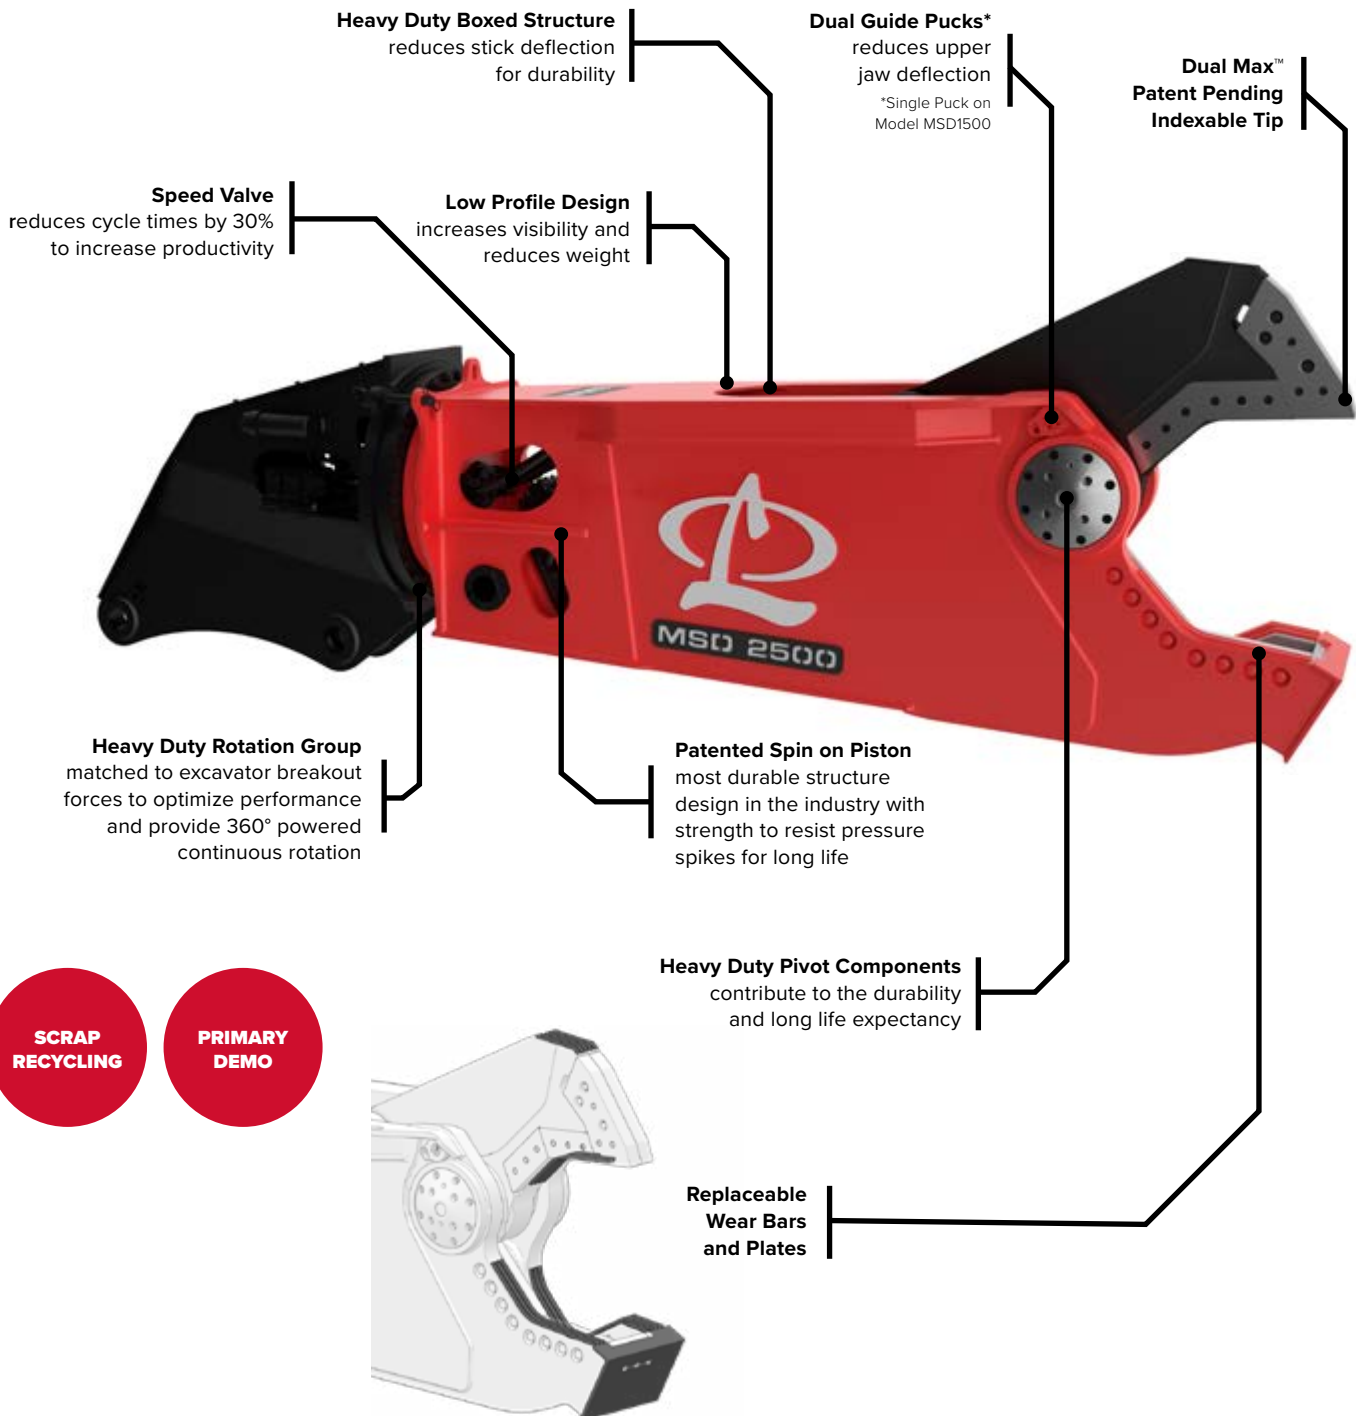

*Model shown uses optional equipment.

SPECIFICATIONS

MSD LEGEND SERIES - MOBILE SHEARS

Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 2nd Member***		Max Excavator Weight - 2nd Member***		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft	m	lbs	mTons	lbs	mTons	lbs	mTons	lbs	mTons
MSD 1500	7,000	3,200	21	540	25	640	6.8	2.1	26,000	12	42,000	19	55,000	25	70,000	32
MSD 1500R	7,440	3,400	21	540	25	640	10.0	3.1	40,000	18	48,000	22	66,000	30	88,000	40
MSD 2000	9,000	4,100	28	710	29	740	8.0	2.4	42,000	19	44,000	20	70,000	32	99,000	45
MSD 2000R	11,000	5,000	28	710	29	740	10.8	3.3	48,000	22	53,000	24	88,000	40	99,000	45
MSD 2250	10,600	4,800	30	760	30	760	8.6	2.6	44,000	20	51,000	23	88,000	40	110,000	50
MSD 2250R	12,700	5,800	30	760	30	760	11.7	3.6	53,000	24	66,000	30	99,000	45	110,000	50
MSD 2500	11,900	5,400	31	790	33	840	8.7	2.7	51,000	23	66,000	30	88,000	40	154,000	70
MSD 2500R	14,800	6,700	31	790	33	840	12.7	3.9	66,000	30	88,000	40	110,000	50	154,000	70
MSD 3000	14,200	6,400	34	860	37	940	10.0	3.1	66,000	30	77,000	35	143,000	65	176,000	80
MSD 3000R	17,100	7,800	34	860	37	940	13.1	4.0	88,000	40	99,000	45	154,000	70	176,000	80
MSD 4000	17,100	7,800	38	970	43	1090	11.5	3.5	77,000	35	88,000	40	143,000	65	187,000	85
MSD 4000R	19,800	9,000	38	970	43	1090	14.8	4.5	99,000	45	110,000	50	176,000	80	187,000	85
MSD 4500	18,700	8,500	39	990	43	1090	11.0	3.4	88,000	40	132,000	60	165,000	75	CONSULT FACTORY	
MSD 4500R	21,300	9,700	39	990	43	1090	14.3	4.3	110,000	50	165,000	75	187,000	85	CONSULT FACTORY	

InSite available for items highlighted in red

MSD SABER SERIES - MOBILE SHEARS

Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 2nd Member***		Max Excavator Weight - 2nd Member***		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft	m	lbs	mTons	lbs	mTons	lbs	mTons	lbs	mTons
MSD 7R	1,200	500	11	280	10	250	6.0	1.8	7,000	3	20,000	9	20,000	9	26,000	12
MSD 800	2,250	1,000	15	380	17	430	5.7	1.7	15,000	7	20,000	9	22,000	10	35,000	16
MSD 800R	2,750	1,200	15	380	17	430	7.2	2.2	20,000	9	22,000	10	26,000	12	40,000	18
MSD 1000	4,200	1,900	19	480	20	510	6.0	1.8	20,000	9	26,000	12	35,000	16	66,000	30
MSD 1000R	4,400	2,000	19	480	20	510	8.5	2.6	22,000	10	40,000	18	40,000	18	66,000	30
MSD 7500	25,500	11,600	43	1090	45	1140	12.0	3.7	132,000	60	176,000	80	CONSULT FACTORY		CONSULT FACTORY	
MSD 7500R	30,000	13,600	43	1090	45	1140	17.5	5.3	165,000	75	264,000	120	CONSULT FACTORY		CONSULT FACTORY	
MSD 9500	37,500	17,000	48	1220	52	1320	15.5	4.7	176,000	80	CONSULT FACTORY		CONSULT FACTORY		CONSULT FACTORY	
MSD 9500R	45,600	20,700	48	1220	52	1320	22.0	6.7	264,000	120	CONSULT FACTORY		CONSULT FACTORY		CONSULT FACTORY	

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

BLS SERIES - BUCKET LINKAGE SHEARS

Model	Weight		Jaw Opening*		Jaw Depth		Min Excavator Weight - 3rd Member		Max Excavator Weight - 3rd Member	
	lbs	kg	in	mm	in	mm	lbs	mTons	lbs	mTons
BLS 2000	2,900	1,300	20	510	20	510	44,000	20	66,000	30
BLS 3000	4,800	2,200	22	560	23	580	66,000	30	CONSULT FACTORY	


* Jaw openings vary based on excavator specific geometry.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

DESTROYER™ SERIES

FEATURES & BENEFITS

Built for the harshest jobs, LaBounty's Destroyer Class Shear boasts integrated reinforcement and superior protection to minimize downtime and maximize productivity. Not only stronger, the Destroyer can take on bigger jobs so you can put more on the ground.

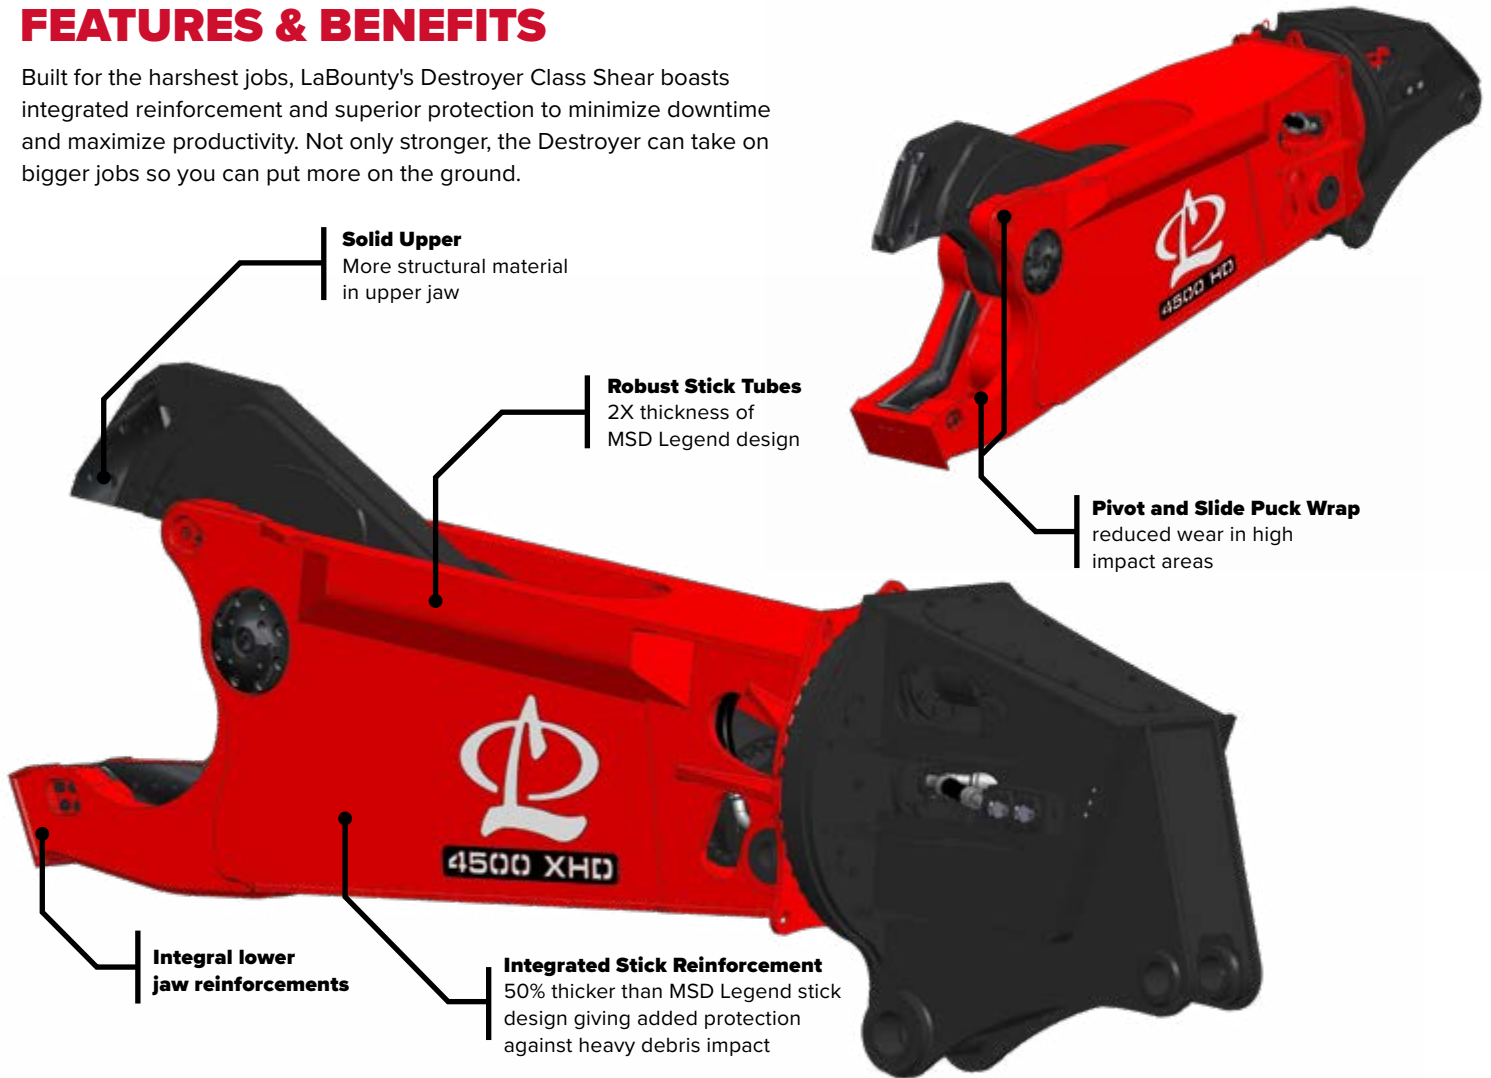

SPECIFICATIONS

Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 2nd Member***		Max Excavator Weight - 2nd Member***		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft.	m	lbs	mTons	lbs	mTons	lbs	mTons	lbs	mTons
MSD 2500R HD	16,100	7,300	31	787	33	838	12.7	3.9	79,000	36	88,000	40	119,000	54	154,000	70
MSD 2500R XHD	16,400	7,400	31	787	33	838	11.9	3.6	81,000	37	110,000	50	143,000	65	176,000	80
MSD 3000R HD	18,500	8,400	34	864	38	965	13.1	4.1	99,000	45	132,000	60	165,000	75	187,000	85
MSD 4000R HD	21,700	9,900	38	965	43	1092	14.8	4.5	110,000	50	154,000	70	182,000	82	209,000	95
MSD 4000R XHD	24,100	10,970	38	965	43	1092	14.8	4.5	121,000	55	CONSULT FACTORY		250,000	114	CONSULT FACTORY	
MSD 4500R HD	23,300	10,600	39	990	43	1092	14.2	4.3	110,000	50	165,000	75	187,000	85	209,000	95
MSD 4500R XHD	25,700	11,700	39	990	43	1092	14.2	4.3	132,000	60	CONSULT FACTORY		264,000	120	CONSULT FACTORY	

InSite available for items highlighted in red

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

REPLACEMENT BLADE KITS

GET THE HIGHEST QUALITY REPLACEMENT BLADE KITS FOR YOUR LABOUNTY® AND GENESIS® MOBILE SHEARS

Ni LABOUNTY[®] HIGH NICKEL

For maximum blade edge life, and less downtime for maintenance, turn to LaBounty's Ni blades which contain a 4% Nickel content. Our high Nickel primary and secondary blades are available for most models of LaBounty's MSD Legend and Saber Series Shears.



LABOUNTY[®] PREMIUM

LaBounty Premium blades have been designed and time tested in an entire spectrum of applications; resulting in the perfect materials and heat treatments to insure you put more scrap on the ground year after year. Our Premium blades are available for all models of LaBounty's MSD Saber and Legend Series Shears.



Genesis[®]

Haven't converted all your shears to LaBounty? LaBounty stocks blades that are compatible with many different models of Genesis® mobile shears.



CERTIFIED REMAN SHEARS

BREATHING NEW LIFE TO USED SHEARS

LaBounty certified remanufactured products go beyond maintenance & repair, older units are stripped to the core, refinished, and rebuilt, providing a cost-effective and sustainable alternative to new. Remanufacturing in the same plant our original equipment is made ensures all specifications, assembly processes, and test procedures are used, providing a certified remanufactured product that matches the performance and quality of new, sometimes better than new if design enhancements have been made since its original manufacture.



STANDARD REMAN INCLUDES:

- New Upper Jaw
- REMAN Cylinder
- Multi-machine Bracket
- Reinforced Lower Jaw and Chin Plate
- REMAN Pivot Group
- New Hardware and Hoses



Call 1-833-723-1843 to talk to your local LaBounty specialist to see if remanufacturing is a good fit for you.

Not interested in replacing your old shear with a remanufactured one but have an old shear you want to sell? Call us to discuss.

* Jaw openings vary based on excavator specific geometry.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

DEMOLITION ATTACHMENTS

**BIGGEST TOOLS FOR
THE BIGGEST JOBS**




UNIVERSAL PROCESSORS

THE ULTIMATE MULTI-TASK TOOL

The next generation of award winning universal processors feature the industry's best power-to-weight ratio for uncompromising power, control, and versatility. These universal processors have multiple jaw set options which allows processing of a wide range of materials using a single tool.

**PRIMARY
&
SECONDARY
DEMO**

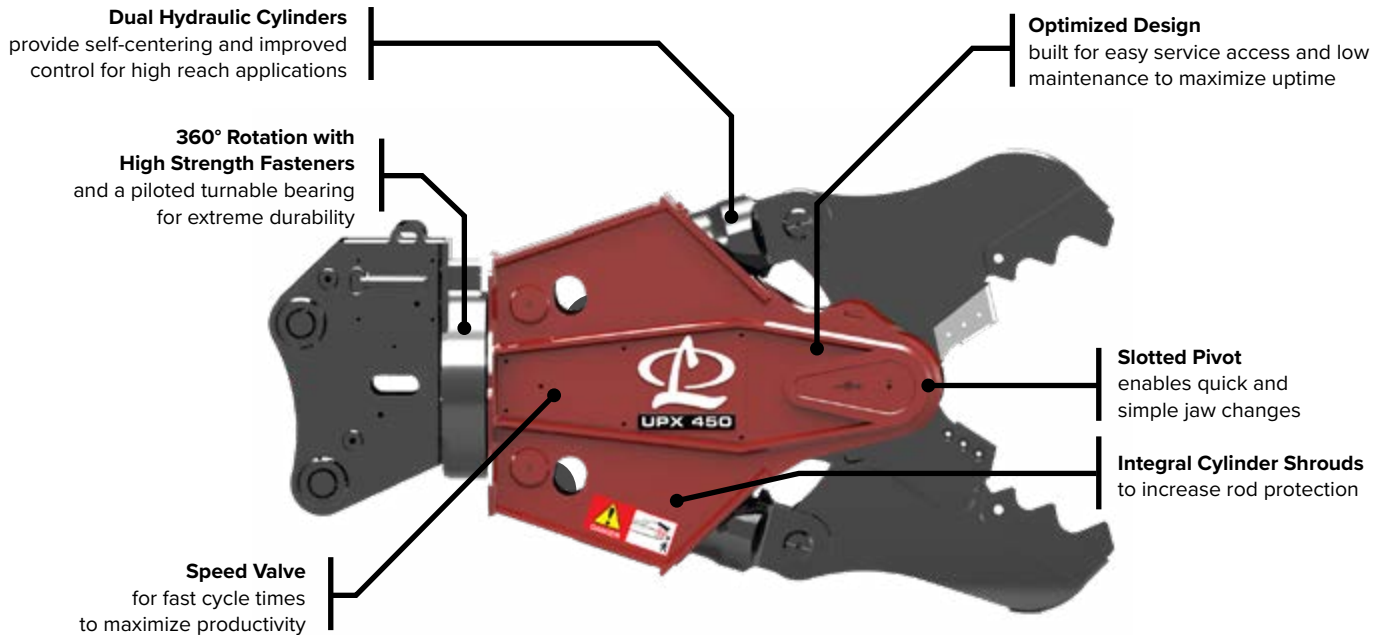

Model	Jaw	Weight (With Jaw)*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight 3 rd Member***		Max Excavator Weight 3 rd Member***	
		lbs	kg	in	mm	in	mm	ft	m	lbs	mTons	lbs	mTons
UPX 250	Shear (SH)	6,300	2,900	21	530	19	480	7.8	2.4	55,000	25	99,000	45
	Concrete Pulverizer (CP)	6,800	3,100	29	740	23	580	7.8	2.4	55,000	25	99,000	45
	Concrete Cracking (CC)	6,300	2,900	36	910	25	640	8.3	2.5	55,000	25	99,000	45
NEW UPX 350	Shear (SH)	8,400	3,820	25	635	26	660	8	2.4	65,000	30	110,000	50
	Concrete Pulverizer (CP)	8,900	4,040	34	860	23	580	8	2.4	65,000	30	110,000	50
	Concrete Cracking (CC)	8,500	3,860	42	1,060	28	710	8	2.4	65,000	30	110,000	50
UPX 450	Shear (SH)	10,550	4,800	26	660	31	790	10.1	3.1	99,000	45	187,000	85
	Concrete Pulverizer (CP)	10,500	4,800	34	860	24	610	9.8	3.0	99,000	45	187,000	85
	Concrete Cracking (CC)	10,300	4,700	42	1,070	31	790	10.1	3.1	99,000	45	187,000	85
NEW UPX 750	Shear (SH)	14,100	6,400	33	830	36	910	11	3.3	135,000	62	187,000	85
	Concrete Pulverizer (CP)	14,500	6,600	40	1,010	27	685	10.5	3.3	135,000	62	187,000	85
	Concrete Cracking (CC)	13,700	6,220	50	1,270	33	830	11	3.3	135,000	62	187,000	85
UPX 950	Shear (SH)	19,000	8,600	44	1,120	41	1,040	13.5	4.1	187,000	85	CONSULT FACTORY	
	Concrete Pulverizer (CP)	20,500	9,300	63	1,600	41	1,040	13.3	4.1	187,000	85	CONSULT FACTORY	
	Concrete Cracking (CC)	20,500	9,300	76	1,930	50	1,270	13.4	4.1	187,000	85	CONSULT FACTORY	
UPX 1800	Shear (SH)	33,600	15,300	48	1,220	46	1,170	15.5	4.7	CONSULT FACTORY		CONSULT FACTORY	
	Concrete Cracking (CC) ****	35,500	16,100	73	1,850	50	1,270	15.5	4.7	CONSULT FACTORY		CONSULT FACTORY	
UPX 2800 (HR)	Shear (SH)	45,000	20,400	51	1,300	52	1,320	19.5	5.9	CONSULT FACTORY		CONSULT FACTORY	

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

JAW TYPES

CHOOSING THE RIGHT JAW

CONCRETE CRACKING JAW - CC



CC JAW

Breaks large, oversized concrete (abutments, beams, etc.). Ideal for primary demolition applications. High grade, abrasion resistant steel used in entire jaw. Improved Swift Lock teeth for quick changeover and reduced downtime. Rebar cutting blades in throat.

NOTE: UPX950 Concrete Cracking jaw does not contain Swift Lock Teeth (weld in replaceable).



UPX 450 WITH CONCRETE CRACKING JAWS

CONCRETE PULVERIZER JAW - CP



CP JAW

Excellent for crushing concrete and separating out rebar. Improved Swift Lock teeth allow for quick changeover and reduced downtime. High grade, abrasion resistant steel used in entire jaw. Rebar cutting blades in throat.

NOTE: UPX950 Concrete Pulverizer jaw does not contain Swift Lock Teeth (weld in replaceable).



UPX 950 WITH CONCRETE PULVERIZER JAWS

SHEAR JAW - SH



SH JAW

Cuts rebar and structural steel such as I-beams, H-beams, pipe, etc. Improved pivot components for longer life and patented cutting blade system ensure better performance and reduced maintenance.




UPX 450 WITH SHEAR JAWS

MULTI-JAW DEMOLITION TOOL

SINGLE-CYLINDER VERSATILITY

Versatility is taken to a whole new level with the MRX. With three different interchangeable jaws – a concrete pulverizer, concrete cracker, and shear – the MRX is the answer to most primary and secondary demolition needs. The MRX is also equipped with a short center of gravity and 360-degree rotation for optimal maneuverability. The interchangeable jaws' designs facilitate improved penetration and rapid material downsizing, along with dual rotation motors* for superior holding power and replaceable wear areas for longevity and minimized maintenance.

*standard on MRX 350 and above

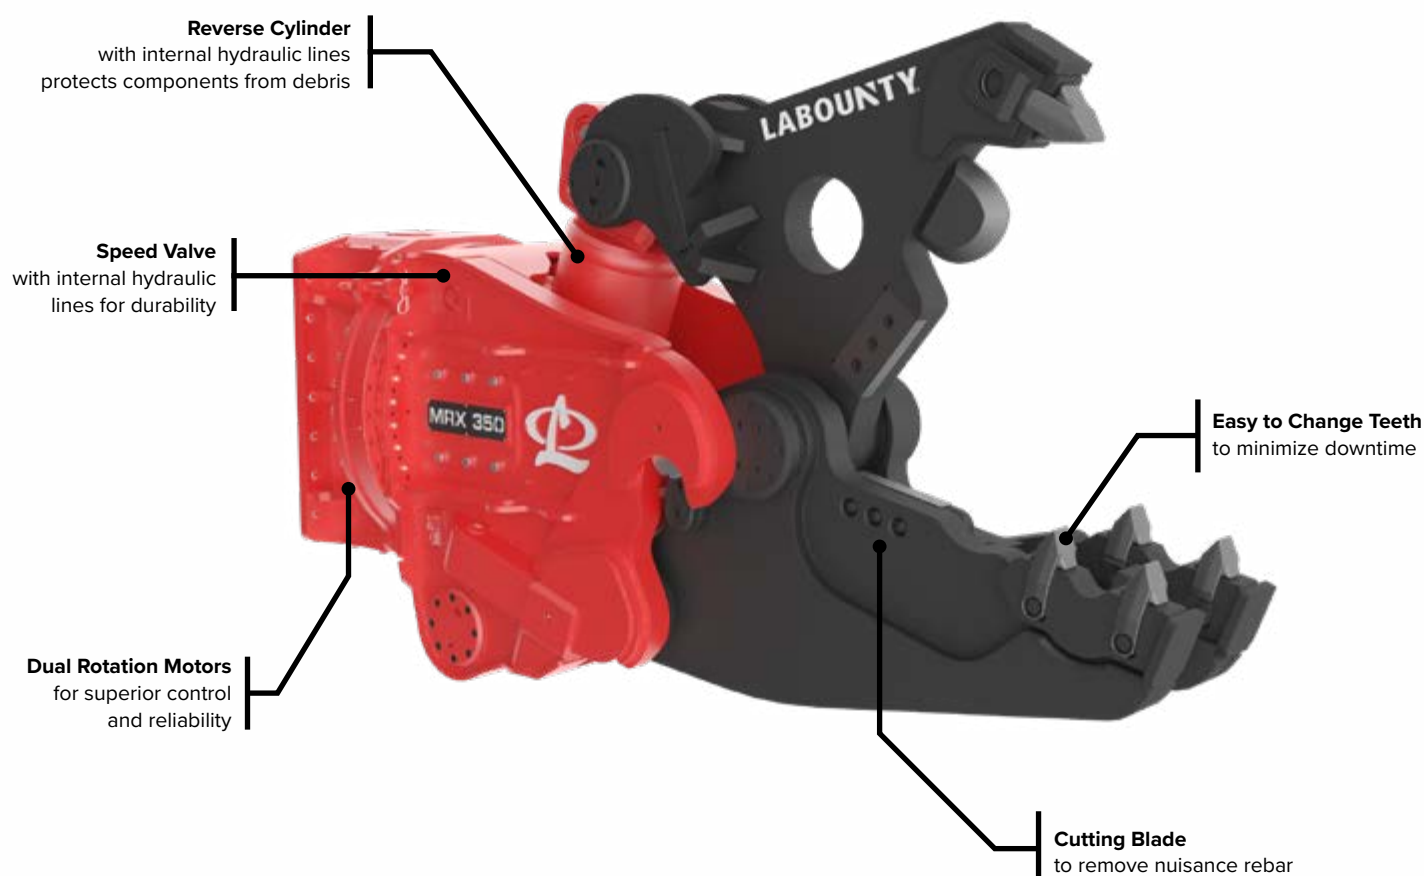

**PRIMARY
&
SECONDARY
DEMO**

SPECIFICATIONS

Model	Jaw	Weight (with jaw)*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
		lbs	kg	in	mm	in	mm	ft	m	lbs	mTons	lbs	mTons
MRX 70	Shear (SH)	1,670	760	9.8	250	12.8	330	5.2	1.6	15,000	7	20,000	9
	Concrete Pulverizer (CP)	1,760	800	20.9	530	20.1	510	5.6	1.7	15,000	7	20,000	9
	Concrete Cracking (CC)	1,760	800	20.7	530	19.3	490	5.7	1.7	15,000	7	20,000	9
MRX 100	Shear (SH)	2,350	1,070	12.6	320	15.4	390	6.1	1.9	20,000	9	29,000	13
	Concrete Pulverizer (CP)	2,460	1,120	26.0	660	24.0	610	6.6	2.0	20,000	9	29,000	13
	Concrete Cracking (CC)	2,520	1,140	23.6	600	24.0	610	6.7	2.0	20,000	9	29,000	13
MRX 130	Shear (SH)	3,330	1,510	15.7	400	17.7	450	6.6	2.0	29,000	13	40,000	18
	Concrete Pulverizer (CP)	3,450	1,570	28.3	720	24.8	630	7.1	2.2	29,000	13	40,000	18
	Concrete Cracking (CC)	3,320	1,510	29.1	740	28.0	710	7.3	2.2	29,000	13	40,000	18
MRX 180	Shear (SH)	4,520	2,050	17.0	430	18.4	470	7.5	2.3	40,000	18	48,000	22
	Concrete Pulverizer (CP)	4,740	2,150	28.2	720	26.0	660	7.9	2.4	40,000	18	48,000	22
	Concrete Cracking (CC)	4,620	2,100	29.4	750	27.3	690	8.3	2.5	40,000	18	48,000	22
MRX 220	Shear (SH)	6,070	2,800	19.1	480	20.1	510	8.3	2.5	48,000	22	57,000	26
	Concrete Pulverizer (CP)	6,270	2,800	32.7	830	29.8	760	8.8	2.7	48,000	22	57,000	26
	Concrete Cracking (CC)	6,180	2,800	33.1	840	31.3	790	9.1	2.8	48,000	22	57,000	26
MRX 260	Shear (SH)	8,220	3,700	19.5	500	22.4	570	8.9	2.7	57,000	26	79,000	36
	Concrete Pulverizer (CP)	8,600	3,900	33.1	840	31.5	800	9.4	2.9	57,000	26	79,000	36
	Concrete Cracking (CC)	8,290	3,800	33.4	820	31.9	810	9.4	2.9	57,000	26	79,000	36
MRX 360	Shear (SH)	9,270	4,200	21.1	540	22.2	570	8.8	2.7	79,000	36	117,000	53
	Concrete Pulverizer (CP)	10,100	4,600	37.4	950	36.1	920	9.5	2.9	79,000	36	117,000	53
	Concrete Cracking (CC)	9,630	4,400	35.5	900	35.5	900	9.7	3.0	79,000	36	117,000	53
MRX 500	Shear (SH)	13,600	6,170	22.6	570	26.0	660	9.8	3.0	117,000	53	165,000	75
	Concrete Pulverizer (CP)	15,030	6,820	43.3	1,100	40.6	1,030	10.8	3.3	117,000	53	165,000	75
	Concrete Cracking (CC)	14,610	6,630	45.3	1,150	42.1	1,070	11.0	3.4	117,000	53	165,000	75
MRX 750	Shear (SH)	19,820	9,000	27.6	700	30.0	760	11.1	3.4	165,000	75	CONSULT FACTORY	
	Concrete Pulverizer (CP)	21,320	9,680	46.3	1,180	43.4	1,100	11.8	3.6	165,000	75	CONSULT FACTORY	
	Concrete Cracking (CC)	20,670	9,380	46.3	1,180	45.7	1,160	11.8	3.6	165,500	75	CONSULT FACTORY	

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

CHOOSING THE RIGHT JAW - 5 MINUTE JAW CHANGES

CONCRETE PULVERIZER - CP



CONCRETE CRACKER - CC



SHEAR JAW - SH



MOBILE ROTATING PULVERIZERS

CRACK AND PULVERIZE WITH POWER & SPEED

With the MRP, users can take on diverse primary and secondary demolition projects with one, versatile tool. A short center of gravity and 360-degree rotation gives the MRP optimal maneuverability, while the jaw's design facilitates improved penetration and rapid material downsizing. Dual rotation motors offer superior holding power and durability, and replaceable wear areas encourage longevity and minimized maintenance.



Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft	m	lbs	m Tons	lbs	m Tons
MRP 90****	2,285	1,000	26	660	22	570	6.0	1.8	20,000	9	29,000	13
MRP 130****	3,100	1,400	28	710	26	650	6.8	2.1	29,000	13	40,000	18
MRP 150	4,963	2,300	29	730	28	710	7.9	2.4	40,000	18	48,000	22
MRP 200	6,222	2,800	34	870	33	850	9.0	2.7	48,000	22	57,000	26
MRP 250	7,654	3,500	37	930	33	850	9.1	2.8	57,000	26	79,000	36
MRP 350	9,365	4,300	40	1000	35	900	9.6	2.9	79,000	36	110,000	50
MRP 500****	13,400	6,100	44	1120	38	960	10.3	3.1	110,000	50	150,000	68
MRP 700****	17,425	7,900	52	1320	45	1150	11.6	3.5	150,000	68	189,000	86
MRP 1000	29,840	13,500	65	1650	57	1460	14.2	4.3	189,000	86	CONSULT FACTORY	
MRP 2000****	50,670	23,000	75	1900	75	1900	16.2	4.9	CONSULT FACTORY		CONSULT FACTORY	
MRP 2500****	55,820	25,300	81	2050	75	1900	18.4	5.6	CONSULT FACTORY		CONSULT FACTORY	

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.


*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

MOBILE DEMOLITION PROCESSORS

PROVEN CRUSHING & CRACKING POWER

The LaBounty Mobile Demolition Processors (MDP) is a highly powerful attachment for crushing and processing concrete in both primary and secondary demolition. The MDP provides **unmatched power-to-weight** for crushing the hardest concrete with smaller excavators, as compared to the competition. With patented Swift Lock Teeth makes maintenance quick and easy. The MDP design is based on the time-tested LaBounty shear and carries forward the legendary performance and durability that only LaBounty can deliver.

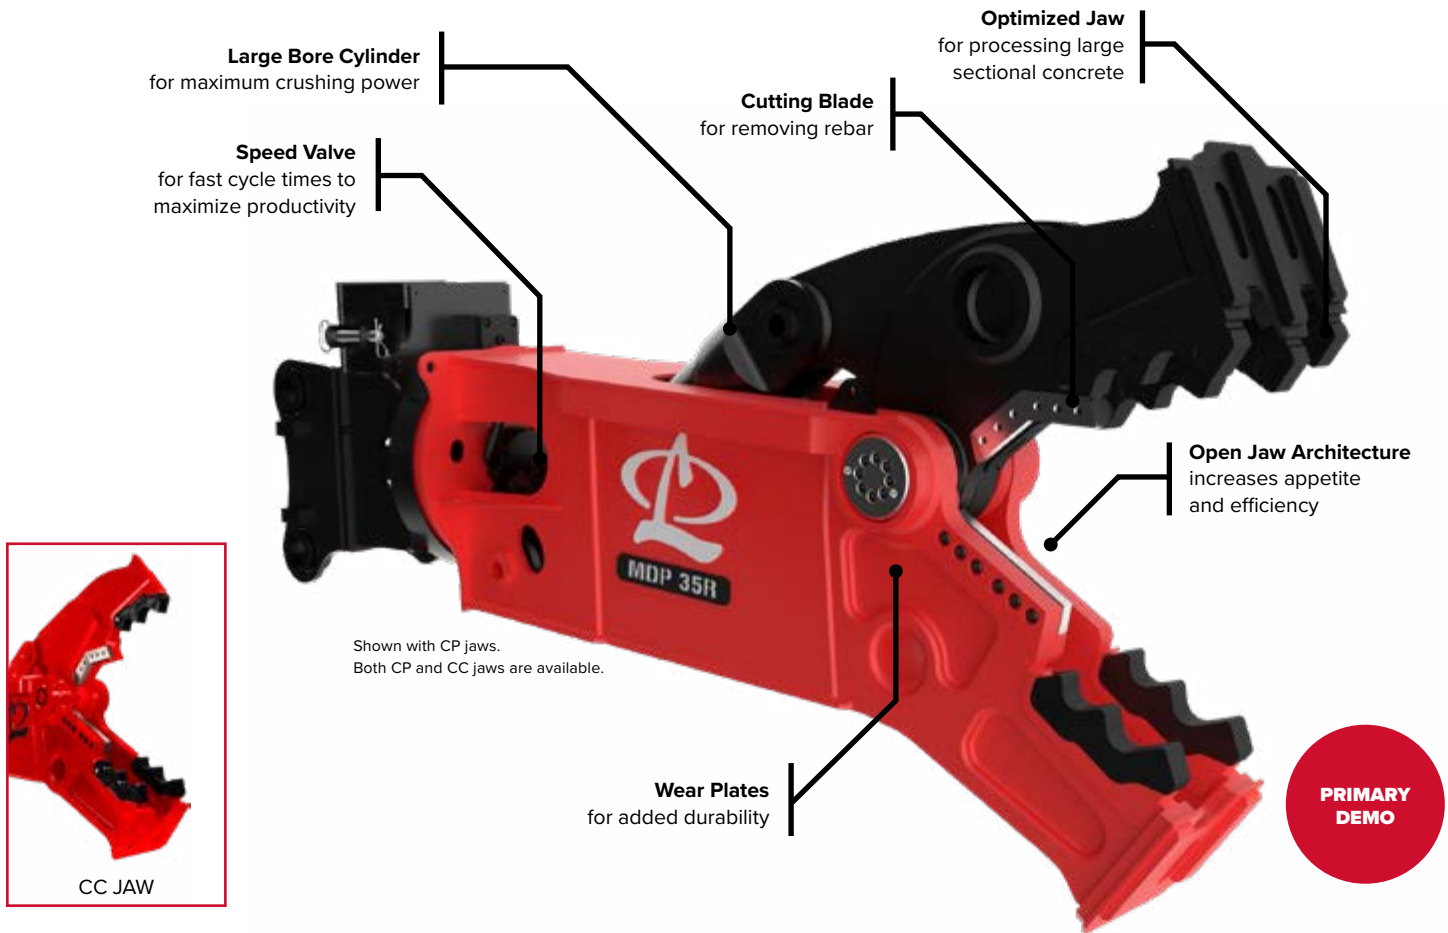

*Speed valve not available on MDP 20 or MDP 27

Model	Jaw	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
		lbs	kg	in	mm	in	mm	ft	m	lbs	m Tons	lbs	m Tons
MDP 20R	Concrete Cracking (CC)	4,600	2,100	25	640	27	690	9.8	3.0	40,000	18	55,000	25
MDP 20R	Concrete Pulverizer (CP)	5,250	2,400	25	640	27	690	9.8	3.0	40,000	18	55,000	25
MDP 27R	Concrete Cracking (CC)	6,300	2,900	32	810	31	790	9.6	2.9	55,000	25	70,000	32
MDP 27R	Concrete Pulverizer (CP)	6,950	3,200	28	710	30	760	9.6	2.9	55,000	25	70,000	32
MDP 35R	Concrete Cracking (CC)	8,250	3,700	38	970	36	910	11.3	3.4	70,000	32	99,000	45
MDP 35R	Concrete Pulverizer (CP)	9,000	4,100	34	860	36	910	11.3	3.4	70,000	32	99,000	45
MDP 50R	Concrete Cracking (CC)	12,400	5,600	50	1270	45	1140	13.1	4.0	99,000	45	187,000	85
MDP 50R	Concrete Pulverizer (CP)	13,900	6,300	50	1270	45	1140	13.1	4.0	99,000	45	187,000	85
MDP 90	Concrete Pulverizer (CP)	21,000	9,500	56	1420	49	1240	15.2	4.6	187,000	85	CONSULT FACTORY	

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.


*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

MOBILE HYDRAULIC PULVERIZERS

MAXIMUM CRUSHING POWER

Designed for high efficiency secondary demolition and concrete recycling, the LaBounty Mobile Hydraulic Pulverizers (MHP) offer **industry-leading power-to-weight ratio** with large jaw capacities. The all-new MHP design has been optimized to pick-up, crush, and separate rebar from concrete faster than ever before thanks to high-tip forces, a large jaw, and fast cycle times.

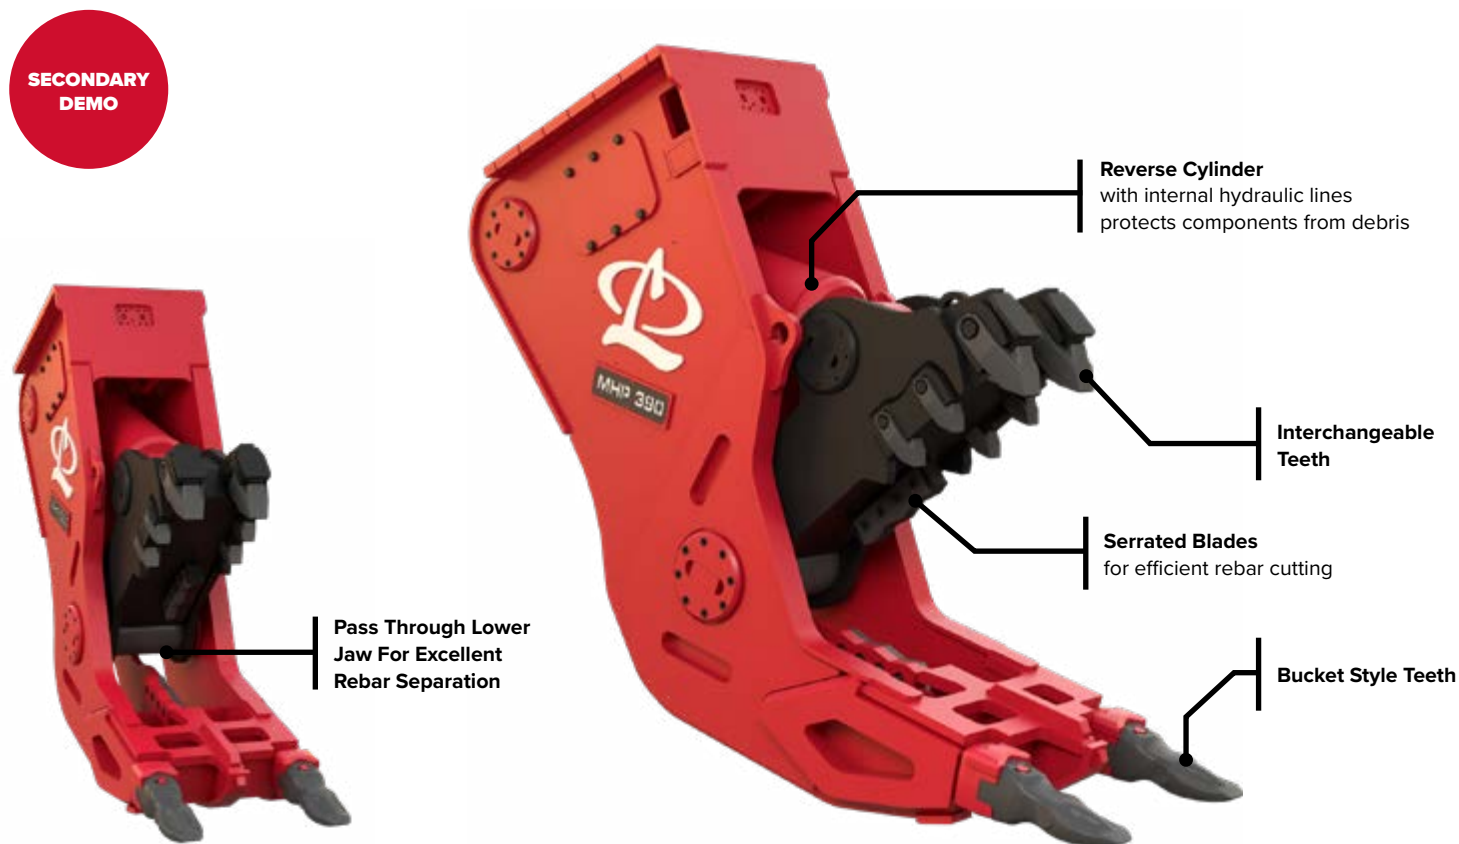

Model	Weight*		Jaw Opening		Jaw Width		Reach**		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft	m	lbs	mTons	lbs	mTons
MHP 80	1,750	800	20.9	530	14.4	370	5.2	1.6	13,000	6	29,000	13
MHP 150	3,000	1,400	27.6	700	18.1	460	6.1	1.8	29,000	13	40,000	18
MHP 220	4,680	2,100	32.5	830	21.3	540	7.1	2.2	40,000	18	55,000	25
MHP 300	6,330	2,900	34.3	870	26.4	670	7.4	2.3	55,000	25	73,000	33
MHP 390	7,740	3,500	37.4	950	29.1	740	7.9	2.4	73,000	33	99,000	45
MHP 550	10,680	4,800	44.5	1130	30.0	760	8.9	2.7	99,000	45	143,000	65
MHP 750	15,050	6,800	49.2	1250	31.5	800	9.8	3.0	143,000	65	CONSULT FACTORY	

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.


LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

CONCRETE PULVERIZERS

MINIMAL INVESTMENT, PROVEN RESULTS

The Concrete Pulverizers (CP) design efficiency uses existing excavator hydraulics for maximum crushing power with minimal investment. Providing controlled demolition and recycling of concrete bridge decks, walls, floor slabs, foundations, silos, culverts, pillars, encased beams, pre-cast structures, and railings.

- CPs feature custom lever arms to provide maximum crushing power.
- CPs use existing excavator hydraulics – no additional circuits are required. A movable front jaw, actuated by the excavator's bucket cylinder, closes into the stationary back jaw. The back jaw is pinned in place with a position arm which is pinned to a mounting pad welded on the lower surface of the excavator's stick.
- 100% welds around heavy torque tubes to minimize torsional stresses.
- Swift Lock Pin on replaceable tooth system are standard on all CP models.

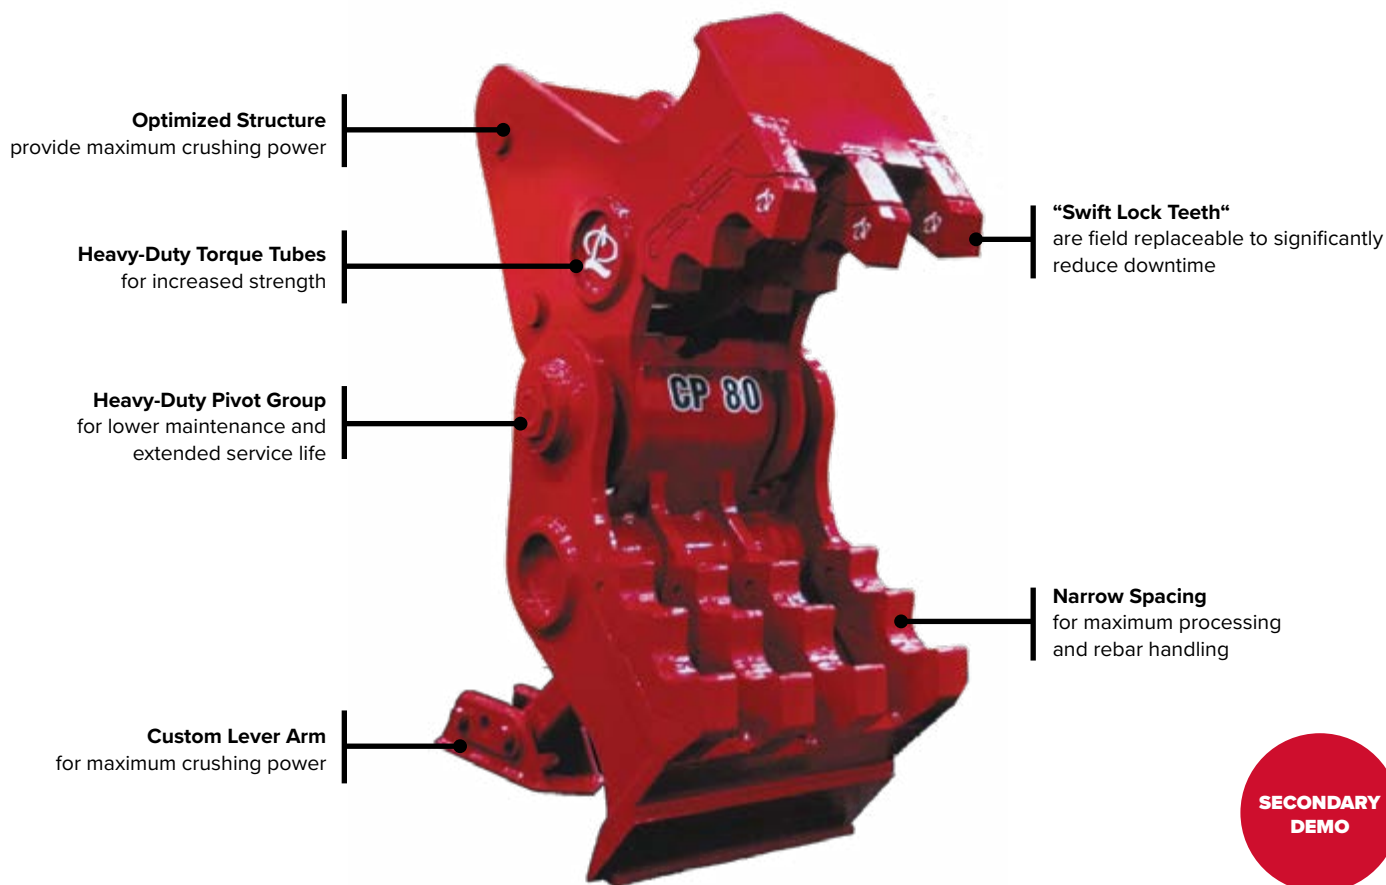

**SECONDARY
DEMO**

Model	Weight		Jaw Opening*		Jaw Depth		Min Excavator Weight - 3rd Member		Max Excavator Weight - 3rd Member	
	lbs	kg	in	mm	in	mm	lbs	m Tons	lbs	m Tons
CP 40**	2,900	1,300	30	760	25	640	35,000	16	46,000	21
CP 60**	3,000	1,400	36	910	27	690	46,000	21	64,000	29
CP 80**	4,500	2,000	42	1070	29	740	64,000	29	88,000	40
CP 100**	6,200	2,800	48	1220	35	890	88,000	40	110,000	50
CP 120**	10,000	4,500	54	1370	40	1020	110,000	50	CONSULT FACTORY	

*Jaw openings vary based on excavator specific geometry.

** Cannot be used with QC

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.


MOUNTED BREAKERS

HARD HITTING RELIABILITY

The LaBounty breaker line is designed for all day, everyday use in the most demanding applications. With heavy-duty housing designs and the latest technologies standard on most models, these breakers are destined to become the tool of choice for primary and secondary demolition, trenching, tunneling and boulder breaking.



FEATURES & BENEFITS

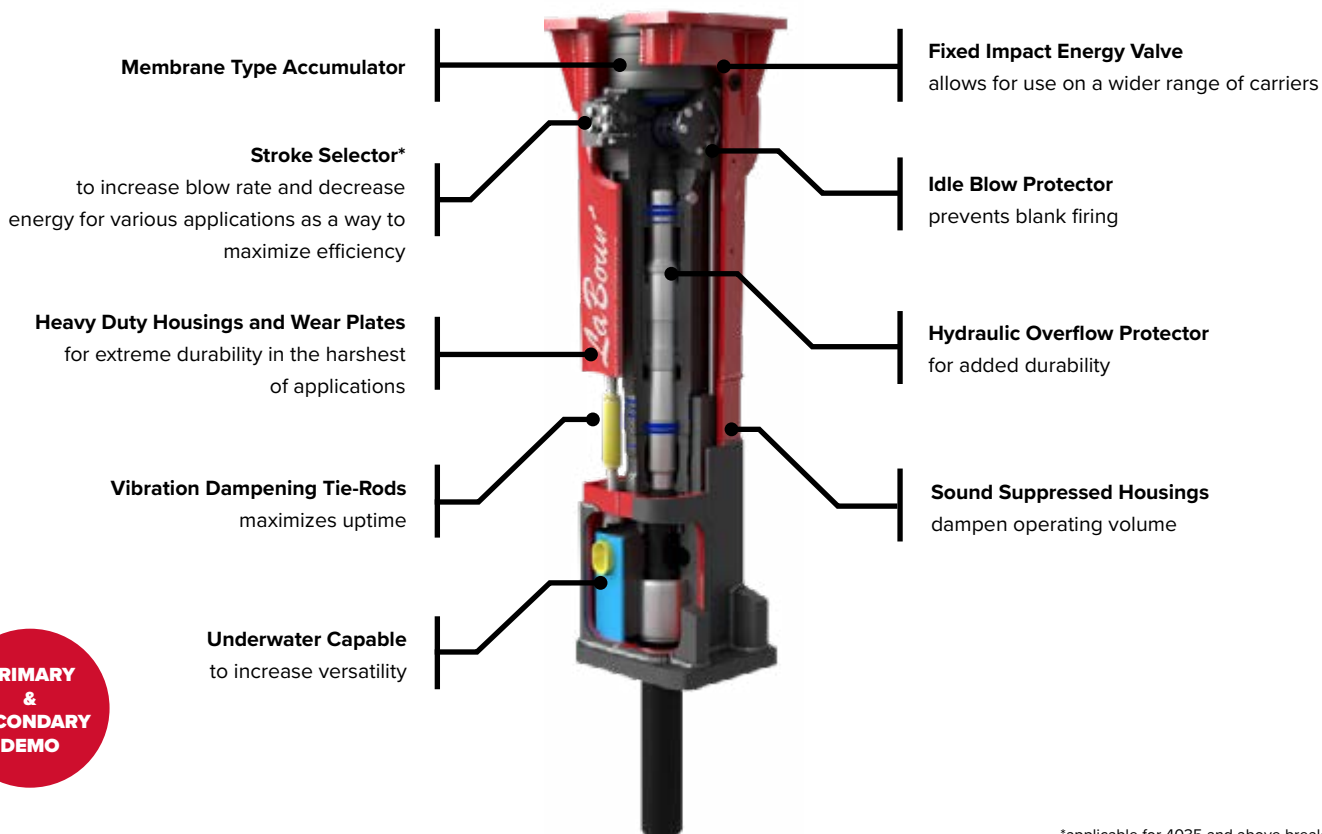

*applicable for 4035 and above breakers only



“With the LaBounty hammer we were able to hammer this stuff out in no time. It’s one of the hardest hitting hammers I’ve ever run, and I’ve run a lot of hammers.”
Harrison Usher, DECO (Demolition Environmental Co.)

Model	Weight*		Impact Energy**		Flow Range	Pressure Range	Impact Rate (BPM)**	Tool Diameter		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
	lbs	kg	ft-lb	J				GPM	PSI	BPM	Ø in	Ø mm	lbs
LMB 1308	1,200	500	1,200	1,600	13-40	1,450-2,030	500-1,700	3.5	90	15,000	7	28,000	12.5
LMB 2015	2,400	1,100	2,500	3,400	24-34	1,960-2,100	540-920	4.5	115	26,000	12	44,000	20
LMB 2620	3,100	1,400	3,500	4,700	32-48	2,030-2,320	430-790	4.9	125	35,000	16	57,000	26
LMB 3025	3,900	1,800	5,000	6,800	37-53	1,960-2,105	450-750	5.3	135	46,000	21	70,000	32
LMB 4035	5,300	2,400	8,000	10,800	42-66	2,175-2,320	370-630	5.6	142	57,000	26	88,000	40
LMB 5545	7,500	3,400	11,000	14,900	66-93	2,175-2,320	400-560	6.5	166	77,000	35	132,000	60
LMB 8055	10,500	4,800	13,000	17,600	74-100	2,320-2,465	370-530	7.5	190	95,000	43	176,000	80
LMB 9580	16,310	7,400	16,000	21,700	95-119	2,465-2,610	290-510	8.5	215	154,000	70	242,000	110

* Weight includes excavator mounting bracket.

**Impact values are dependent on base machine hydraulics.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

DEMOLITION APPLICATIONS GUIDE

METRIC TON		9-12	13-15	16-21	22-28
PRIMARY DEMO	MSD				
	MDP				
PRIMARY & SECONDARY DEMO	UPX				
	MRX				
	MRP				
SECONDARY DEMO	LMB				
	MHP				
	CP				

Largest selection of demolition attachments in North America

29-35


36-50

51-70

71-90

100-200

201-250

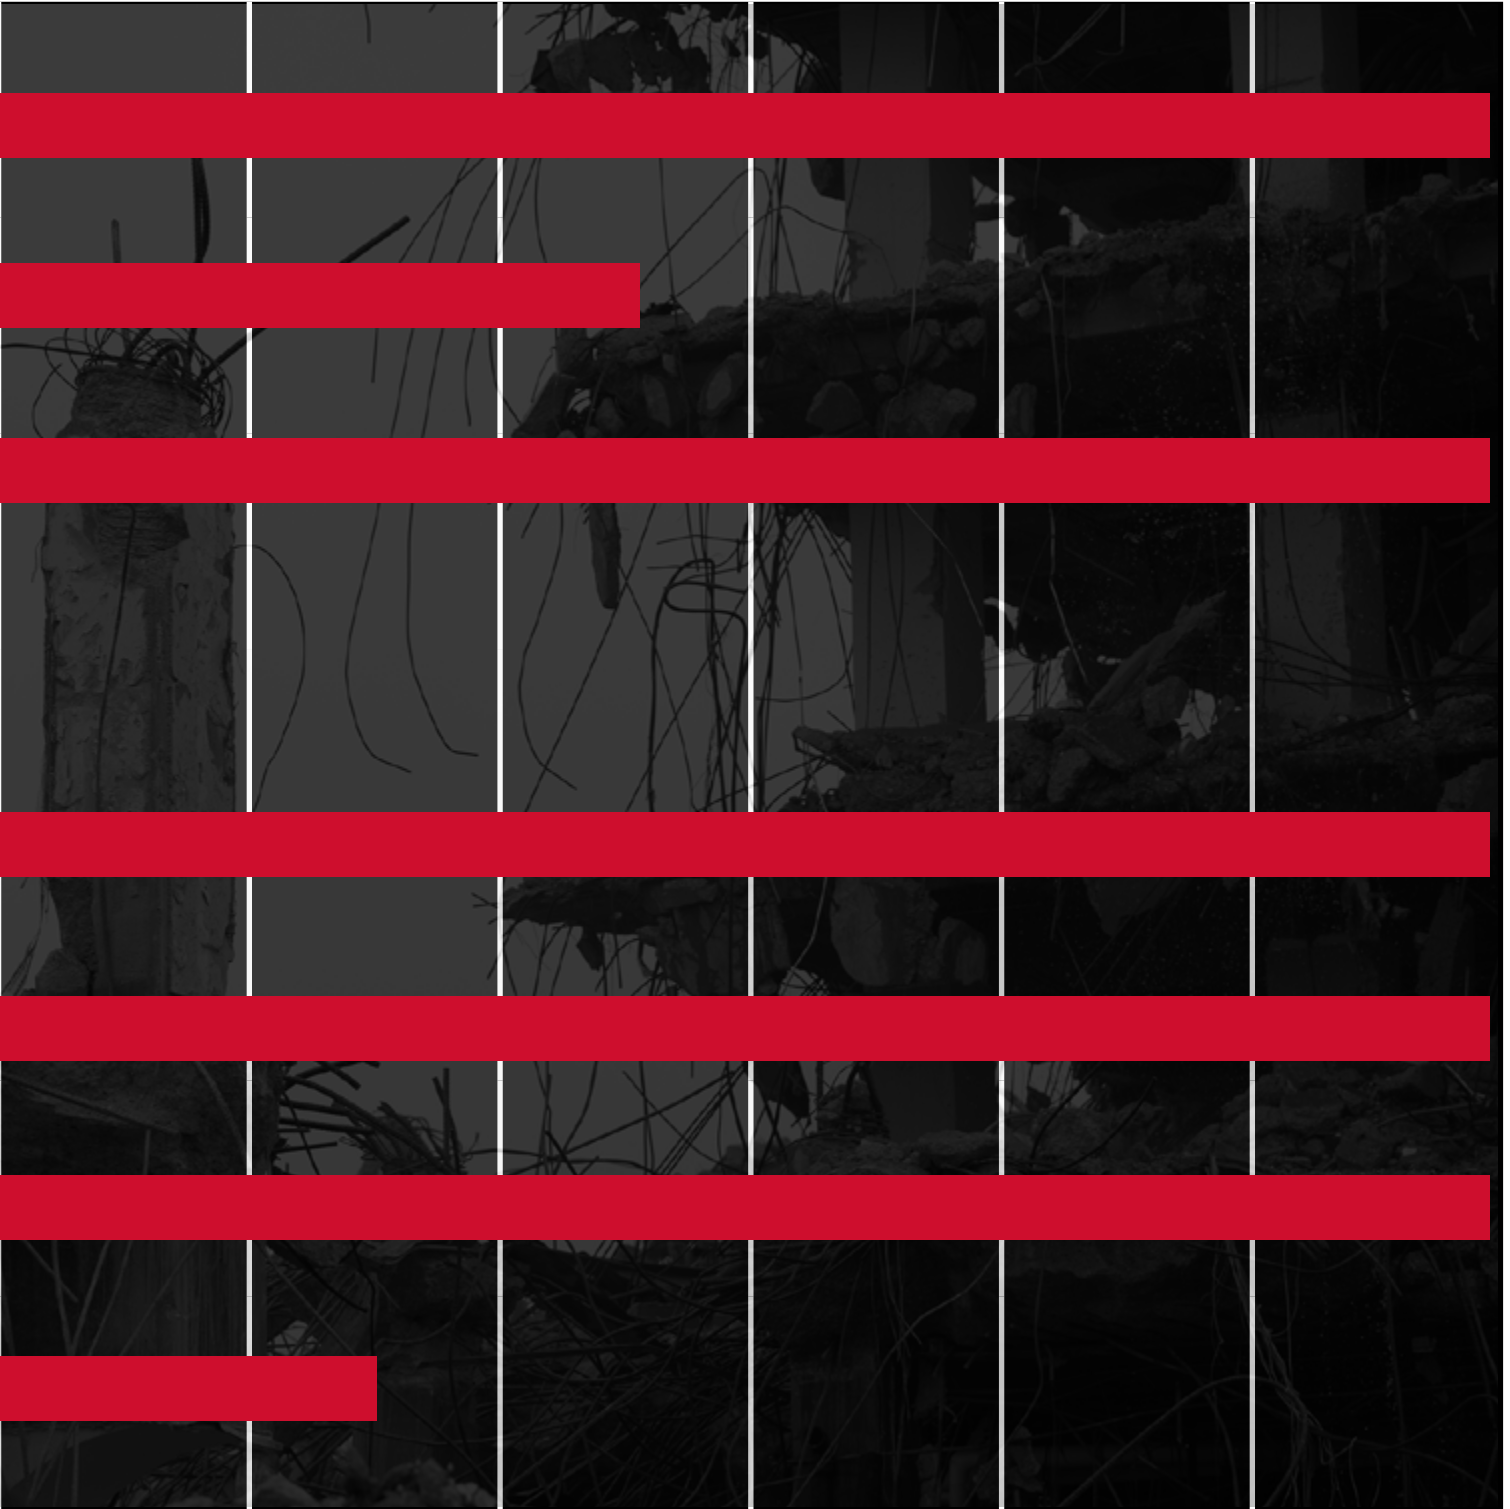




MATERIAL HANDLING



MOBILE DEMOLITION GRAPPLES

HANDLE, SORT & LOAD WITH PRECISION

The Mobile Demolition Grapple (MDG) is the ultimate tool for demolition, material handling, sorting, and loading. The continuous 360° high-torque rotation and synchronized jaw design combine to provide **enhanced material control**.

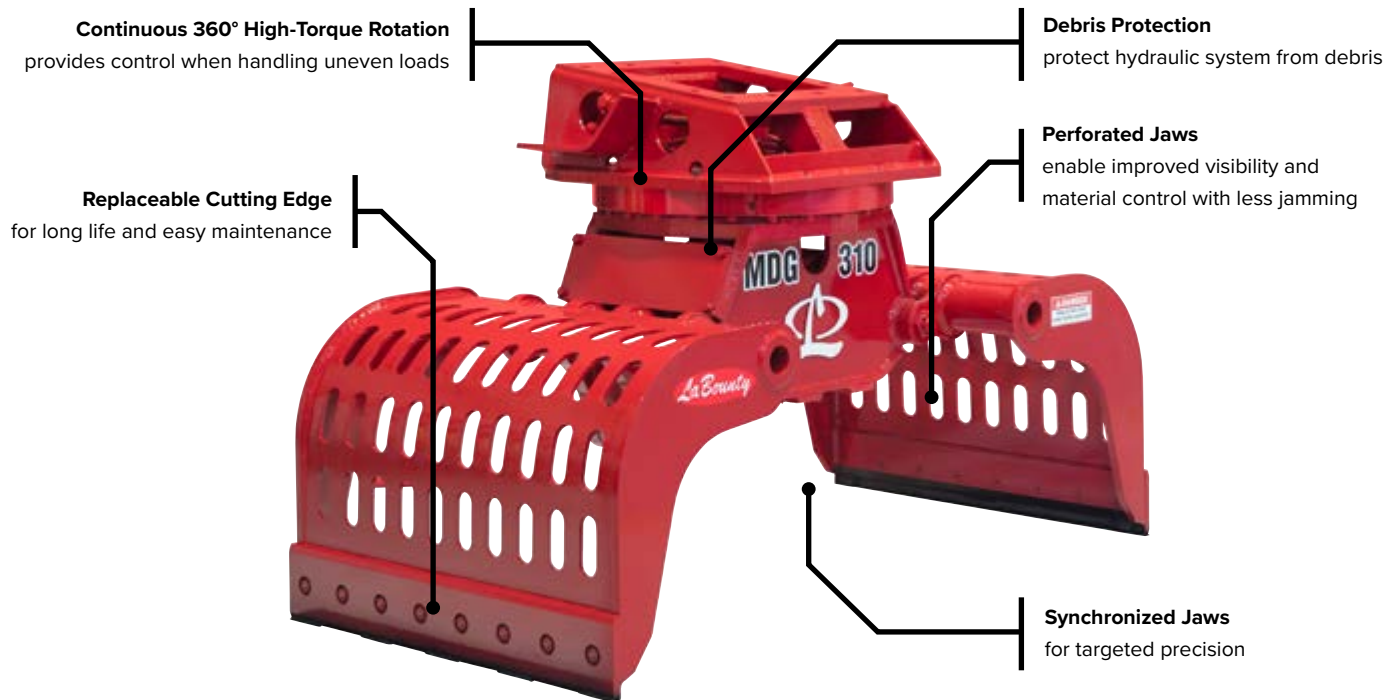
WASTE
DEMO

Model	Weight*		Opening		Jaw Width		Jaw Capacity**		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member ***	
	lbs	kg	in	mm	in	mm	yd ³	m ³	lbs	m Tons		
MDG 70	900	400	59	1,500	28	710	0.3	0.2	11,000	5	22,000	10
MDG 140	1,900	900	71	1,800	31	790	0.5	0.4	22,000	10	29,000	13
MDG 160	2,400	1,100	77	1,960	35	890	0.8	0.6	29,000	13	37,000	17
MDG 250	3,300	1,500	83	2,110	39	990	1.0	0.8	37,000	17	55,000	25
MDG 310	4,200	1,900	87	2,210	47	1,190	1.2	0.9	55,000	25	66,000	30
MDG 400	6,000	2,700	87	2,210	54	1,370	1.4	1.1	66,000	30	CONSULT FACTORY	

* Weight excludes excavator mounting bracket.

**Capacity will vary depending on the make up of the material being handled.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

**SELECTION.
INNOVATION.
PERFORMANCE.**



STANLEY
Infrastructure

INDUSTRIAL TOOLS & ATTACHMENTS

 **PALADIN** **STANLEY** **LABOUNTY**  **PENGO**

www.StanleyInfrastructure.com // 6430 SE Lake Rd. // Portland, OR 97222 // 833.723.1843

2023.01.0