LABOUNTY®

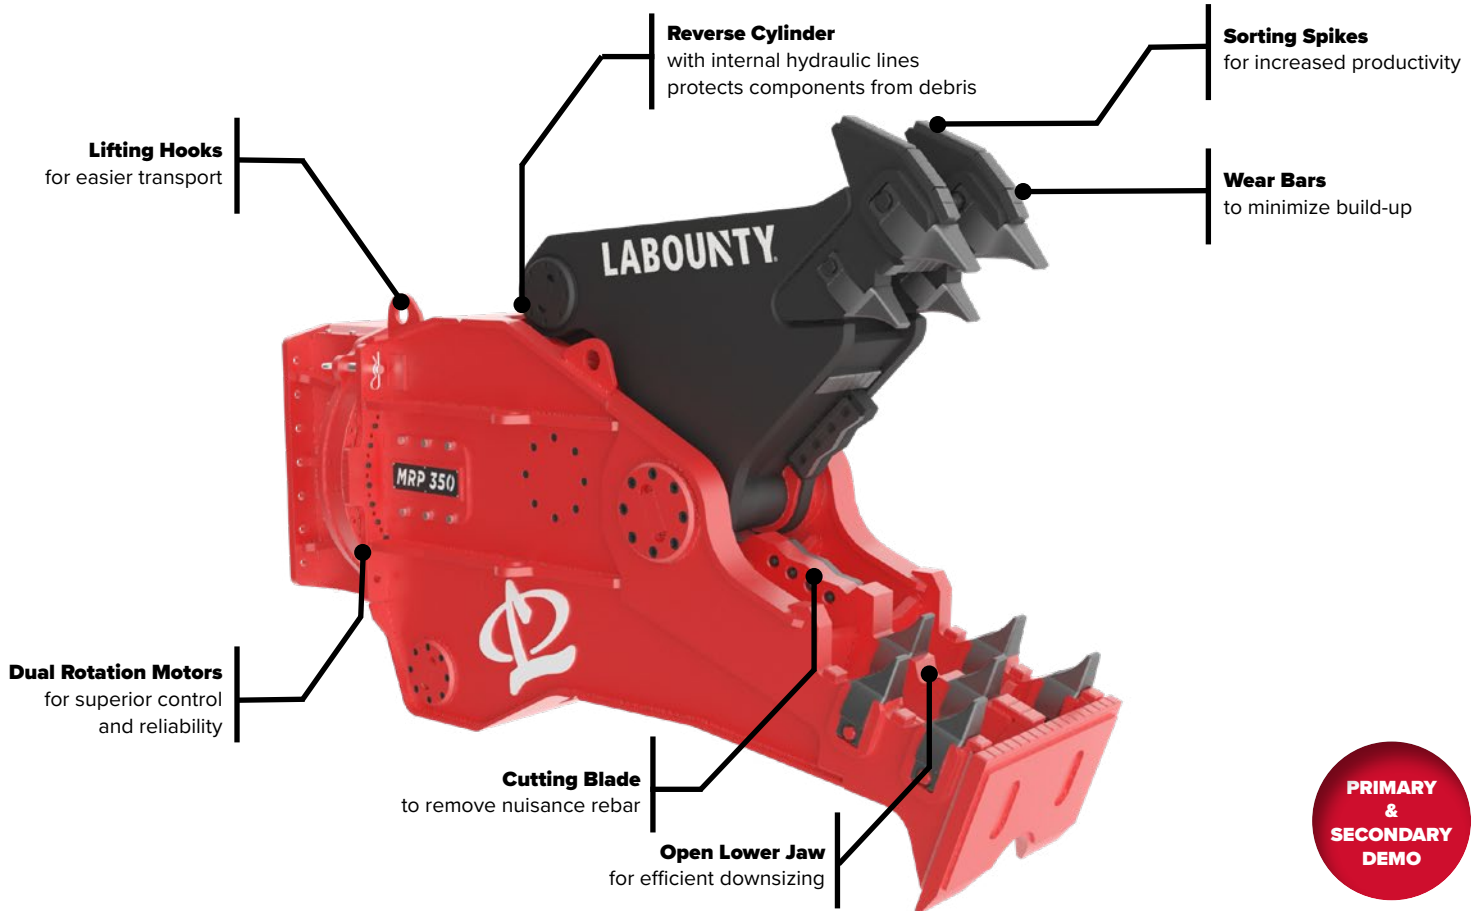www.stanleyinfrastructure.com/brands/labounty

MRP SERIES

MOBILE ROTATING PULVERIZERS

PULVERIZE WITH POWER AND SPEED

The MRP is a versatile tool that enables users to handle primary and secondary demolition projects with ease. With a short center of gravity and 360-degree rotation, it offers optimal maneuverability, while the jaw's design facilitates improved penetration and rapid material downsizing. Dual rotation motors provide superior holding power and durability, and replaceable wear areas encourage longevity and reduced maintenance.

MRP SERIES
MOBILE ROTATING PULVERIZERS

Reverse Cylinder
with internal hydraulic lines
protects components from debris

Sorting Spikes
for increased productivity

Lifting Hooks
for easier transport

Wear Bars
to minimize build-up

LABOUNTY

MRP 350

Dual Rotation Motors
for superior control
and reliability

Cutting Blade
to remove nuisance rebar

Open Lower Jaw
for efficient downsizing

PRIMARY & SECONDARY DEMO

SPECIFICATION TABLE

Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft	m	lbs	m Tons
MRP 90****	2,285	1,000	26	660	22	570	6.0	1.8	20,000	9
MRP 130****	3,100	1,400	28	710	26	650	6.8	2.1	29,000	13
MRP 150	4,963	2,300	29	730	28	710	7.9	2.4	40,000	18
MRP 200	6,222	2,800	34	870	33	850	9.0	2.7	48,000	22
MRP 250	7,654	3,500	37	930	33	850	9.1	2.8	57,000	26
MRP 350	9,365	4,300	40	1000	35	900	9.6	2.9	79,000	36
MRP 500****	13,400	6,100	44	1120	38	960	10.3	3.1	110,000	50
MRP 700****	17,425	7,900	52	1320	45	1150	11.6	3.5	150,000	68
MRP 1000	29,840	13,500	65	1650	57	1460	14.2	4.3	189,000	86
MRP 2000****	50,670	23,000	75	1900	75	1900	16.2	4.9	CONSULT FACTORY	
MRP 2500****	55,820	25,300	81	2050	75	1900	18.4	5.6	CONSULT FACTORY	

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.