


www.stanleyinfrastructure.com/brands/labounty

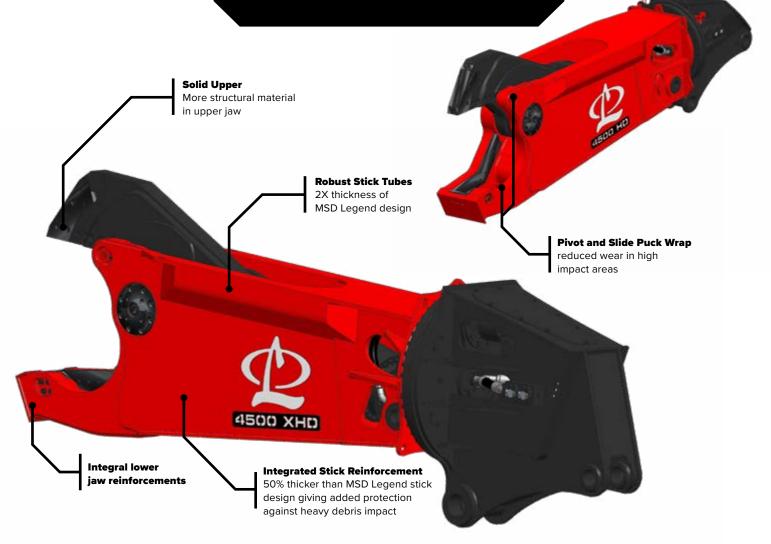

MSD DESTROYERTM

EXTREME DUTY MOBILE SCRAP SHEARS

MEETING THE TOUGH DEMANDS OF DEMOLITION AND SHIP BREAKING

You need equipment that will withstand the harshest of applications. We delivered.

LaBounty is excited to offer the MSD Destroyer Sheer. All of the reliability the MSD Legend offers bolstered with integrated reinforcement for the most extreme jobs.

MSD DESTROYER SERIES EXTREME DUTY MOBILE SCRAP SHEARS

3YR WARRANTY - YOU'RE PROTECTED WITH INSITE



Every shear ordered with InSite will comes with a 3-year warranty. InSite pulls information from LaBounty shears to provide performance metrics that help increase productivity and reduce downtime.





SUPERIOR PROTECTION Integrated reinforcement of the shears main body, pivot area, and lower jaw.



LESS MAINTENANCE Reduced wear on shear body and lower jaw



MORE CAPABLE XHD's Fortified Rotation Assembly provides additional rotation torque

provides additional rotation torque to handle more material

SPECIFICATIONS

Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 2nd Member***		Max Excavator Weight - 2nd Member***		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft.	m	lbs	mTons	lbs	mTons	lbs	mTons	lbs	mTons
MSD 2500R HD	16,100	7,300	31	787	33	838	12.7	3.9	79,000	36	88,000	40	119,000	54	154,000	70
MSD 2500R XHD	16,400	7,400	31	787	33	838	11.9	3.6	81,000	37	110,000	50	143,000	65	176,000	80
MSD 3000R HD	18,500	8,400	34	864	38	965	13.1	4.1	99,000	45	132,000	60	165,000	75	187,000	85
MSD 4000R HD	21,700	9,900	38	965	43	1092	14.8	4.5	110,000	50	154,000	70	182,000	82	209,000	95
MSD 4000R XHD	24,100	10,970	38	965	43	1092	14.8	4.5	121,000	55	CONSULT FACTORY		250,000	114	CONSULT FACTORY	
MSD 4500R HD	23,300	10,600	39	990	43	1092	14.2	4.3	110,000	50	165,000	75	187,000	85	209,000	95
MSD 4500R XHD	25,700	11,700	39	990	43	1092	14.2	4.3	132,000	60	CONSULT I	ACTORY	264,000	120	CONSULT F	ACTORY

InSite available for items highlighted in red

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.



INDUSTRIAL TOOLS & ATTACHMENTS 🖤 PALADIN. STANLEY. LABOUNTY. 🥐 PENGO