

50  **LABOUNTY**

www.stanleyinfrastructure.com/brands/labounty

**UNCOMPROMISING
VERSATILITY**

UPX

UNIVERSAL PROCESSORS

UNCOMPROMISING VERSATILITY


The next generation of award winning universal processors feature the industry's best power-to-weight ratio for uncompromising power, control, and versatility. Whatever the job you need to tackle, LaBounty has the tool, with processors ranging from 6,300 to 45,000 pounds.

We're proud to announce that the UPX 2800 won the Innovation Award for Tools & Attachments at the World Demolition Summit in Dublin, Ireland in 2018. According to the judges **"The features of the product made it ideal for the demands of the modern production environment."**



UPX SERIES

UNIVERSAL PROCESSORS

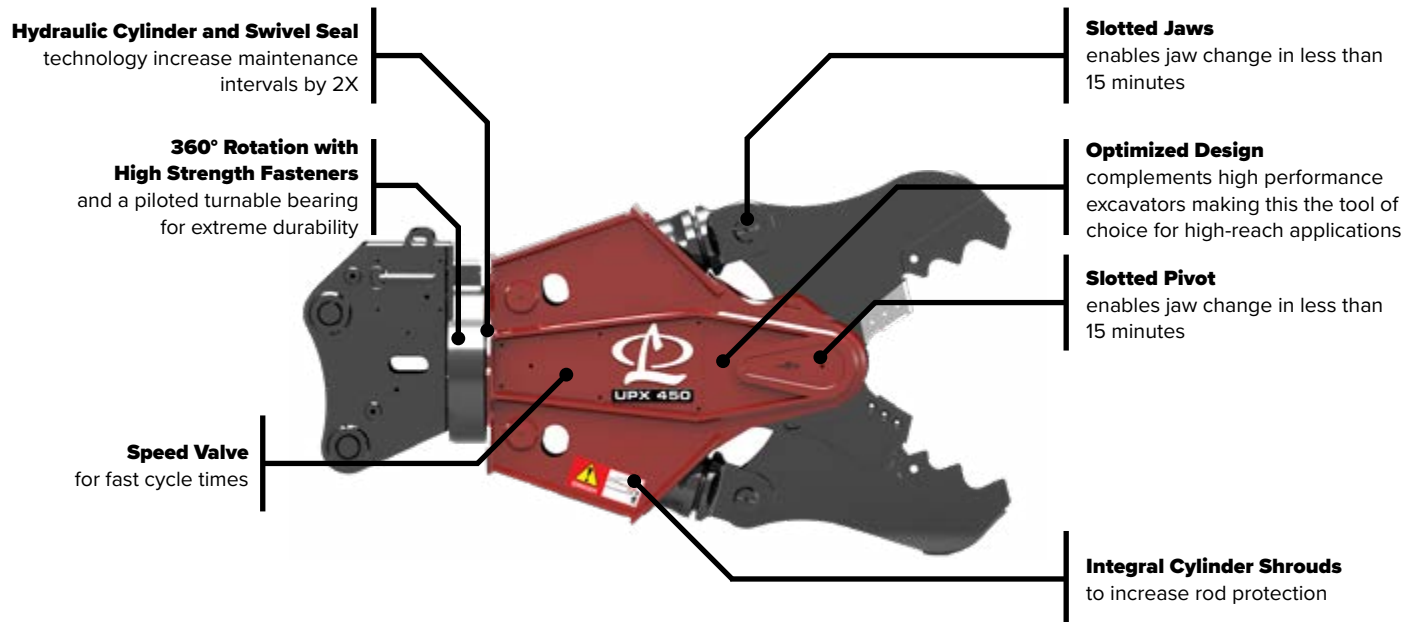

SPECIFICATION TABLE

Model	Jaw	Weight (With Jaw)*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight 3 rd Member***		Max Excavator Weight - 3 rd Member***	
		lbs	kg	in	mm	in	mm	ft	m	lbs	mTons	lbs	mTons
UPX 250	Shear (SH)	6,300	2,900	21	530	19	480	7.8	2.4	55,000	25	99,000	45
	Concrete Pulverizer (CP)	6,800	3,100	29	740	23	580	7.8	2.4	55,000	25	99,000	45
	Concrete Cracking (CC)	6,300	2,900	36	910	25	640	8.3	2.5	55,000	25	99,000	45
UPX 350	Shear (SH)	8,400	3,820	25	635	26	660	8	2.4	65,000	30	110,000	50
	Concrete Pulverizer (CP)	8,900	4,040	34	860	23	580	8	2.4	65,000	30	110,000	50
	Concrete Cracking (CC)	8,500	3,860	42	1,060	28	710	8	2.4	65,000	30	110,000	50
UPX 450	Shear (SH)	10,550	4,800	26	660	31	790	10.1	3.1	99,000	45	187,000	85
	Concrete Pulverizer (CP)	10,500	4,800	34	860	24	610	9.8	3.0	99,000	45	187,000	85
	Concrete Cracking (CC)	10,300	4,700	42	1,070	31	790	10.1	3.1	99,000	45	187,000	85
UPX 750	Shear (SH)	14,100	6,400	33	830	36	910	11	3.3	135,000	62	187,000	85
	Concrete Pulverizer (CP)	14,500	6,600	40	1,010	27	685	10.5	3.3	135,000	62	187,000	85
	Concrete Cracking (CC)	13,700	6,220	50	1,270	33	830	11	3.3	135,000	62	187,000	85
UPX 950	Shear (SH)	19,000	8,600	44	1,120	41	1,040	13.5	4.1	187,000	85	CONSULT FACTORY	
	Concrete Pulverizer (CP)	20,500	9,300	63	1,600	41	1,040	13.3	4.1	187,000	85	CONSULT FACTORY	
	Concrete Cracking (CC)	20,500	9,300	76	1,930	50	1,270	13.4	4.1	187,000	85	CONSULT FACTORY	
UPX 1800	Shear (SH)	33,600	15,300	48	1,220	46	1,170	15.5	4.7	CONSULT FACTORY		CONSULT FACTORY	
	Concrete Cracking (CC) ****	35,500	16,100	73	1,850	50	1,270	15.5	4.7	CONSULT FACTORY		CONSULT FACTORY	
UPX 2800 (HR)	Shear (SH)	45,000	20,400	51	1,300	52	1,320	19.5	5.9	CONSULT FACTORY		CONSULT FACTORY	

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.



INDUSTRIAL TOOLS & ATTACHMENTS

