



www.stanleyinfrastructure.com/brands/labounty

UNCOMPROMISING

VERSATILITY

UPX

UNIVERSAL PROCESSORS

UNCOMPROMISING VERSATILITY


The next generation of award winning universal processors feature the industry's best power-to-weight ratio for uncompromising power, control, and versatility. Whatever the job you need to tackle, LaBounty has the tool, with processors ranging from 6,300 to 45,000 pounds.

We're proud to announce that the UPX 2800 won the Innovation Award for Tools & Attachments at the World Demolition Summit in Dublin, Ireland in 2018. According to the judges **"The features of the product made it ideal for the demands of the modern production environment."**



UPX SERIES

UNIVERSAL PROCESSORS

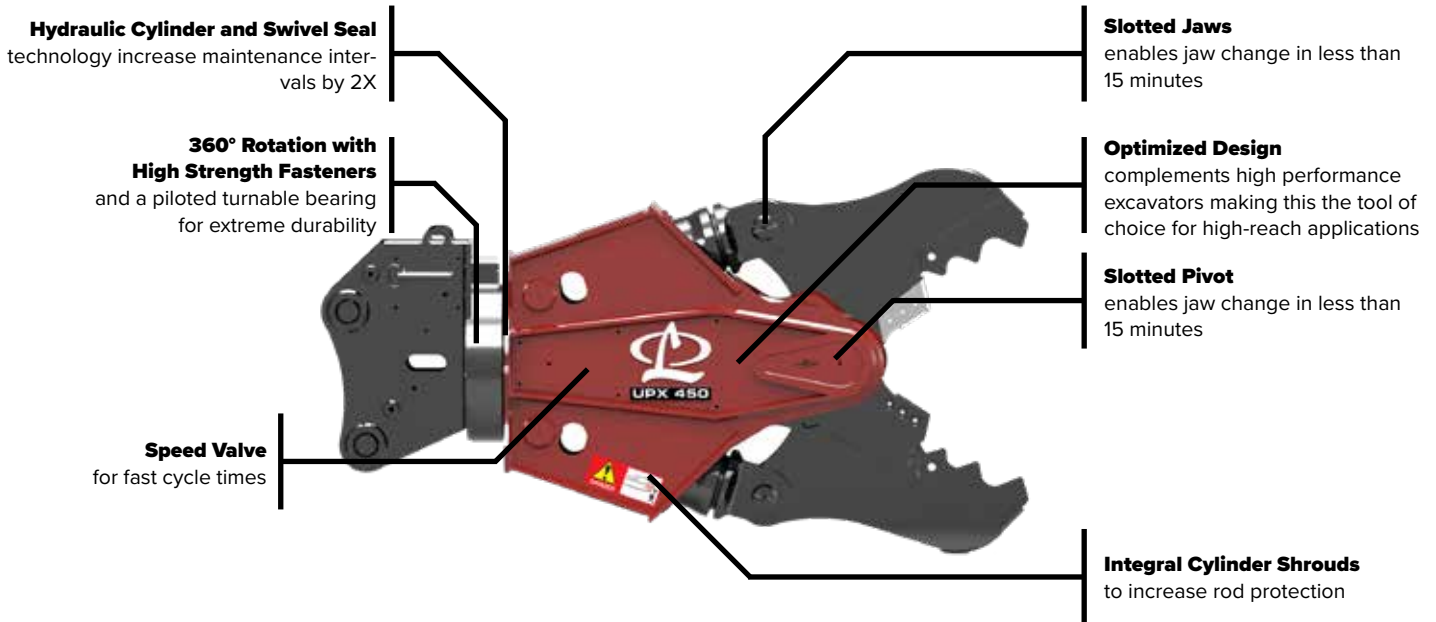

SPECIFICATION TABLE

Model	Jaw	Weight (With Jaw)*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight 3 rd Member***	
		lbs	kg	in	mm	in	mm	ft	m	lbs	m Tons
UPX 250	Shear (SH)	6,300	2,900	21	530	19	480	7.8	2.4	55,000	25
	Concrete Pulverizer (CP)	6,800	3,100	29	740	23	580	7.8	2.4	55,000	25
	Concrete Cracking (CC)	6,300	2,900	36	910	25	640	8.3	2.5	55,000	25
UPX 450	Shear (SH)	10,550	4,800	26	660	31	790	10.1	3.1	99,000	45
	Concrete Pulverizer (CP)	10,500	4,800	34	860	24	610	9.8	3.0	99,000	45
	Concrete Cracking (CC)	10,300	4,700	42	1,070	31	790	10.1	3.1	99,000	45
UPX 950	Shear (SH)	19,000	8,600	44	1,120	41	1,040	13.5	4.1	187,000	85
	Concrete Pulverizer (CP)	20,500	9,300	63	1,600	41	1,040	13.3	4.1	187,000	85
	Concrete Cracking (CC)	20,500	9,300	76	1,930	50	1,270	13.4	4.1	187,000	85
UPX 1800	Shear (SH)	33,600	15,200	48	1,220	46	1,170	15.5	4.7	CONSULT FACTORY	
	Concrete Cracking (CC) ****	35,500	16,100	73	1,850	50	1,270	15.5	4.7	CONSULT FACTORY	
UPX 2800 (HR)	Shear (SH)	45,000	20,400	51	1,300	52	1,320	19.5	5.9	CONSULT FACTORY	

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weights should be used as a guide only, all mounting configurations must be preapproved by LaBounty.

**** Proposed specifications. Please consult the factory.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.



“When you expect the unexpected there is nothing else like the UPX.”

Jeff Fries, Total Wrecking & Environmental



www.stanleyinfrastructure.com/brands/labounty
833-723-1843

