

HG60 GRINDERS

STANLEY®




SPECIFICATIONS

HG60	
Capacity	2.5 in.dia. x 2.75 in.
Speed	4500 rpm
	30 lpm
Input Flow Range	5 - 10 gpm
	19 - 38 lpm
Input Pressure	2000 psi
	140 bar
Maximum Back Pressure	250 psi
	17 bar
Weight	11.3 lbs.
	5.13 kg
Length	23 in.
	58.4 mm
Width	3.3 in.
	8.4 cm
Height	4 in.
	10.2 cm
Motor	Integral
Porting	-8 SAE O-ring
Hose Whips	Yes
Connection	HTMA Flush Face Couplers
Arbor	5/8 in.-11

FEATURES:

- Bull Nose Grinder reduces operator fatigue in repetitive grinding operations while providing an ideal tool for de-burring drilled holes.
- Matched Hydraulic Motor specifically designed to optimize power and rpm for grinding applications provides increased efficiency and effectiveness.
- Built-in Flow Control Valve prevents the chance of excessive spindle speed, protecting the motor and increasing tool life.

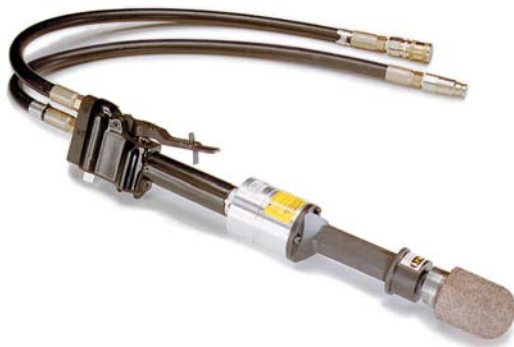

**THE DE-BURRING
MACHINE -
THE POWER OF
HYDRAULICS**

STANLEY

Stanley Hydraulic Tools | 3810 SE Naef Road | Milwaukie, Oregon 97267 | +01.503.659.5660 | 800.972.2647 | www.stanleyhydraulic.com

HG60 GRINDERS

STANLEY®

ORDERING INFORMATION

MODEL	PART NO.	DESCRIPTION
HG60	HG60130	Bull Nose Grinder

ACCESSORIES

ITEM NO.	DESCRIPTION
30878	Grinding Stone

WARRANTY:

Stanley Hydraulic Tools and their associated parts are warranted against defects in materials and workmanship for a period of twelve months from the date of purchase. Stanley Hydraulic Tools reserves the right to repair or replace only those parts which prove to have been defective at the time of purchase. This warranty becomes void if maximum flow and pressure ratings are exceeded.

STANLEY®

Stanley Hydraulic Tools | 3810 SE Naef Road | Milwaukie, Oregon 97267 | +01.503.659.5660 | 800.972.2647 | www.stanleyhydraulic.com